




Flatpack Canopy FP-Range

Range: 10 - 650 kVA

The standard range flat pack canopies are available from 10 - 650kVA, designed around Perkins and Volvo engines in combination with different alternators such as Mecc Alte. Dedicated cross members, exhaust piping and radiator adaptors are available from stock. The tank frames can be used for all types of engines and generators. For canopies with different engine and generator combinations the possibilities can be verified by Sound Proof Systems on request.

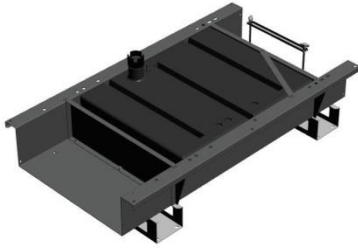

TAF-020B Tankframe



FP-030E Flat-Pack Canopy



FP-300 Flat-Pack Canopy

STANDARD SCOPE OF SUPPLY:

- Zinc plated (galvanised) steel
- Powder coat RAL9010
- Fuel tank (8hrs)
- Mechanical fuel gauge
- Bunded base (FP-020 - FP-100)
- Forklift pockets / feet
- Radiator cap in roof
- Viewing window (except E version)
- Lifting eye (except E version)
- Battery tray(s)

AVAILABLE OPTIONS:

- Exhaust silencer
- Exhaust piping plus flex
- Engine and alternators supports
- Anti vibration mountings
- Bunded base (FP-150 - FP-650)

THE PLEASURE OF SILENCE

A LONG HISTORY IN CANOPIES

Sound Proof Systems has a long history in canopies with over 15 years of experience in the industry. To provide our worldwide customer base with a compact, easy to transport product, Sound Proof Systems has an extensive range of self-assembly Flat-Pack canopies..

Tankframe

Model	Prime Power kVA / kW	Outer dimensions (mm)			Inner dimensions (mm)			Weight (kg)	Tank capacity (ltr)	Soundlevel @1m dB(A)
		Length	Width	Height	Length	Width	Height			
TAF-020B	20/16	1250	710	285	-	-	-	50	66	-
TAF-030B	30/24	1440	750	305	-	-	-	55	90	-
TAF-060B	60/48	1635	750	340	-	-	-	85	130	-
TAF-100B	100/80	1835	750	400	-	-	-	95	200	-
TAF-150	150/120	2385	990	280	-	-	-	130	345	-
TAF-200	200/160	2645	990	280	-	-	-	140	380	-
TAF-300	300/240	2855	1130	310	-	-	-	195	500	-
TAF-400	400/320	2995	1140	415	-	-	-	240	750	-
TAF-500	500/400	3600	1140	455	-	-	-	270	960	-
TAF-650	650/520	3490	1590	415	-	-	-	380	1070	-

Canopy

Model	Prime Power kVA / kW	Outer dimensions (mm)			Inner dimensions (mm)			Weight (kg)	Tank capacity (ltr)	Soundlevel @1m dB(A)
		Length	Width	Height *)	Length	Width	Height			
FP-020E	20/16	1595	725	1280	1245	630	880	130	66	73
FP-020	20/16	1595	725	1280	1245	630	880	160	66	72
FP-020T ₆₀	20/16	2304	762	2110	-	-	-	900	1000	60
FP-020LP	20/16	1675	725	1055	1465	610	735	160	66	72
FP-030E	30/24	1720	755	1430	1450	660	1020	180	90	74
FP-030EL	30/24	1830	755	1430	1560	660	1020	185	90	74
FP-030	30/24	1810	755	1450	1450	660	1020	195	90	73
FP-060E	60/48	2060	775	1545	1790	680	1085	220	130	75
FP-060EW	60/48	2060	855	1545	1790	760	1085	225	130	75
FP-060	60/48	2310	775	1540	1790	680	1085	280	130	74
FP-100E	100/80	2425	855	1650	2085	760	1135	310	200	78
FP-100EH	100/80	2425	855	1700	2085	760	1185	320	200	78
FP-100	100/80	2770	855	1655	2085	760	1135	350	200	77
FP-150	150/120	3190	1000	1895	2320	900	1200	465	345	78
FP-200	200/160	3625	1000	1940	2580	900	1200	500	380	81
FP-300	300/240	4135	1140	2220	2790	1045	1450	810	500	85
FP-400	400/320	4700	1145	2740	3190	1050	1750	970	750	83
FP-500	500/400	5330	1145	2880	3540	1050	1805	1125	960	85
FP-650	650/520	5070	1595	2835	3430	1500	1815	1235	1070	88

*) including lifting eye and/or silencer

THE PLEASURE OF SILENCE

BESPOKE PRODUCT

This unique concept creates enormous advantages for the transport of a complete canopy to OEM customers. Beside the standard products Sound Proof Systems also designs, develops and produces bespoke products. The product range covers solutions for generating sets, pump sets and powerpacks.

www.soundproofsystems.com



Engelenburgstraat 45, 7391 AM Twello - The Netherlands
Tel: +31(0)571-276900 - info@soundproofsystems.com

**SOUND PROOF
SYSTEMS BV**